

FM-280D-S

600lbs x 2 DUAL ELECTRO MAGNETIC LOCK (MONITORED)




Product Features

- With LED lights on.
- Signal output to indicate the lock status (monitored).
- Low power consumption with high efficiency.
- Reliable holding force: 600lbs x 2.
- High strength material, anodized aluminum housing.
- Special anti-residual magnetic design makes automatic access control safer and more convenient.
- Durable and silence operation.
- Suitable for double leaf - wooden door, glass door, metal door, etc.

Technical Specifications


Model	FM-280D-S
Holding Force	600lbs x 2
Material	Finishes for shell: Anodized aluminum
	Finishes for magnet: Zinc
	Finishes for armature: Zinc
Feature	Fail-safe: Power to lock (signal output, monitored)
Voltage	DC 12V
Current	12V/450mA x 2
Door	Double door
Lock Size	500Lx47Wx25H (mm)
Armature Size	180Lx11Wx38H (mm) x 2

Installation

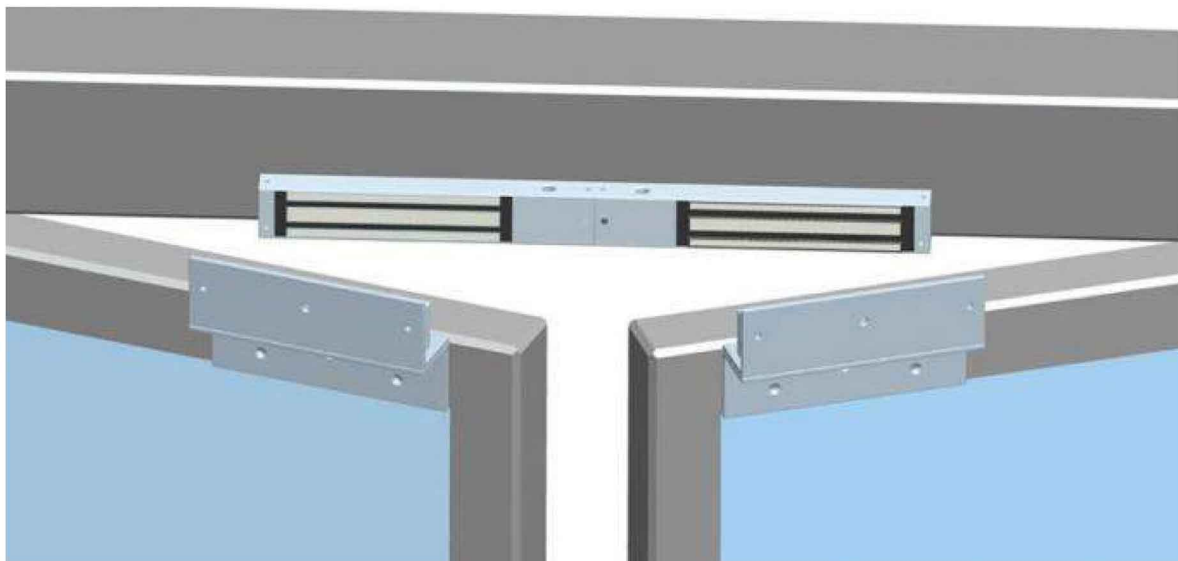


Bracket Installation:

L Bracket-For outward opening door
When the door frame thickness is less than 42mm, L bracket is needed.

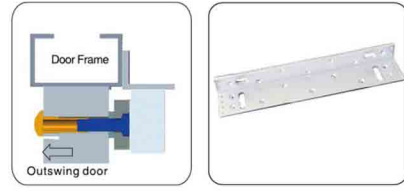

ZL Bracket-For inward opening door
For inward opening door, ZL bracket is needed.

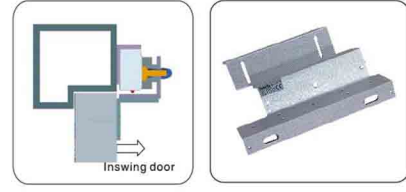

U Bracket

For the frameless glass door. U bracket is needed.



Bracket Mounting:

